


The frameless retractable glazing system with the lowest track



Bottom weighted system

Maximum security. Valid for any type of structure.

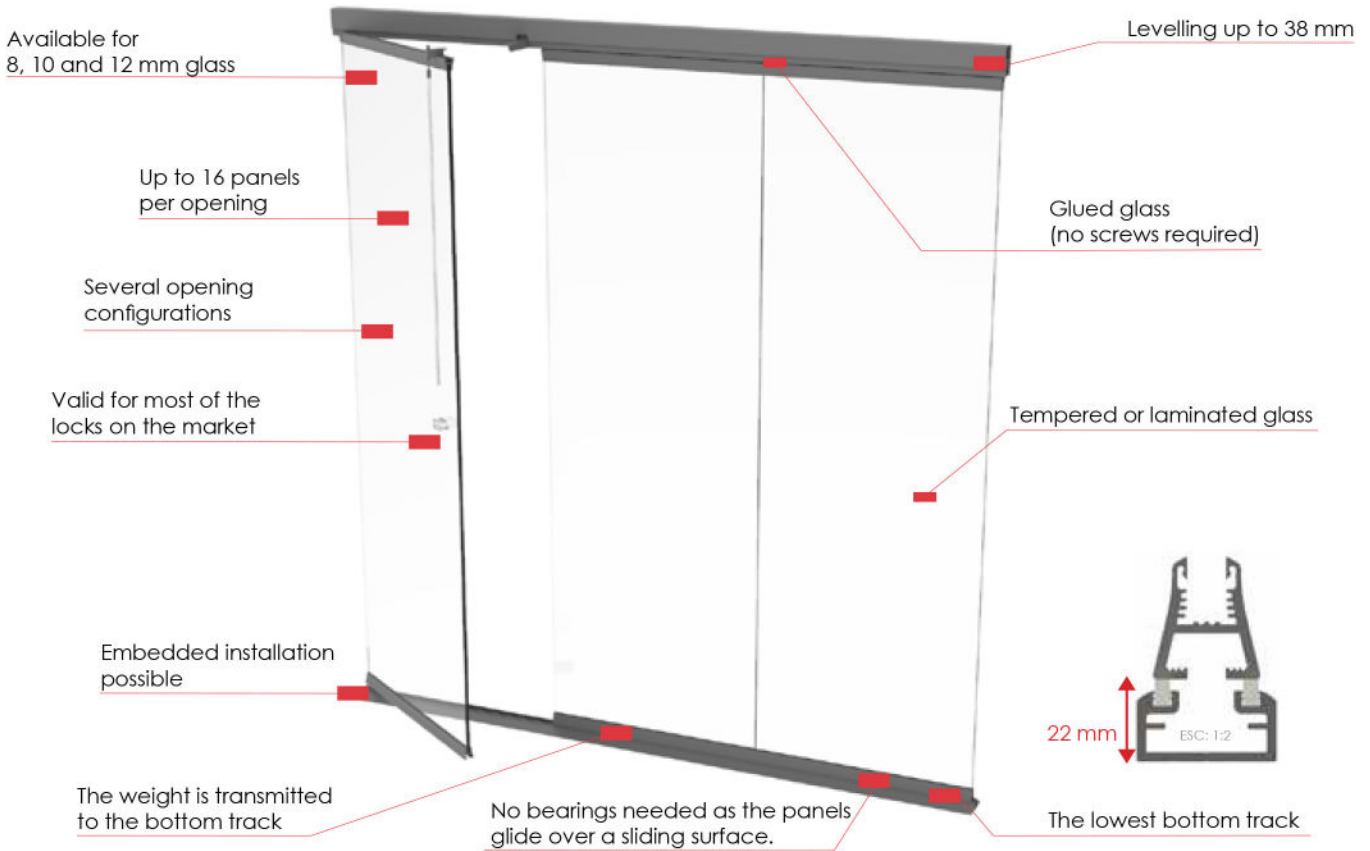

No wheels or bearings

Maximum reliability. Smooth and silent functioning over the sliding tracks.



Ideal for indoor installations

CLAROFLEX[®]PIVOTmini is perfect for indoor installations although it can also be used outdoors.



Three options available

Full length bars, precut and mechanized projects or already glazed systems.



Minimal maintenance

No need for annual high cost maintenance.



Fixing screws for glass not needed

Higher reliability and lower cost because there is no need for special screws or drills in the glass.



CLAROFLEX ERP[®] for customers

A whole solution for our product: project design, quotations, orders and stock management.



Warranty

All CLAROFLEX[®] products have 5 years warranty.

The **frameless glazing system CLAROFLEX[®]PIVOTmini** is the only one on the market specifically designed for indoor spaces, although it can be also installed outdoors.

The maintenance is minimal, due to its conception and the use of high quality materials. This allows a better reliability.

Features

- **Operation without bearings:** The panels move over a special sliding surface.
- **Opening options:** Inside or outside opening from both sides is possible, depending on your needs. Top and bottom door locks. Air circulation position.
- **Colours:** Anodized, powder coating or wood-like finishes.
- **Glass:** Laminated or tempered glass. 8, 10 or 12 mm.
- **Corners:** Panels can pass through corners between 90° and 270°.
- **High resistant components.** As per the saline mist tests ISO 9227, ASTM B117 and DIN 50021. More than 750 hours in the test chambers.
- **Components.** Made of different kinds of plastics and metal alloys: stainless steel, aluminium, zamak.

Technical features


- **Sound insulation:** 34 dB.
- **Thermal transmittance:** 5.6 W/m²K.
- **UNE 12600 (2003) test:** 1C1

* Data for 10 mm tempered glass

Max. dimensions

- **Panel width:** 800 mm.
- **Door width:** 1000 mm.
- **Maximum height:** 3150 mm.
- **Maximum number of panels per opening.** 16*.
* Consult our team for more panels.

Configurations


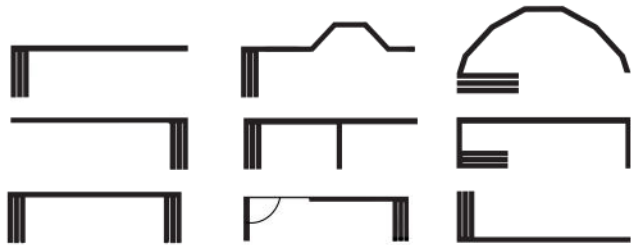


Options



CLAROFLEX® ARMLESS

System drawings

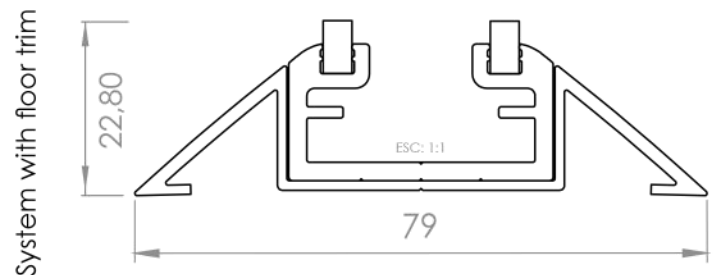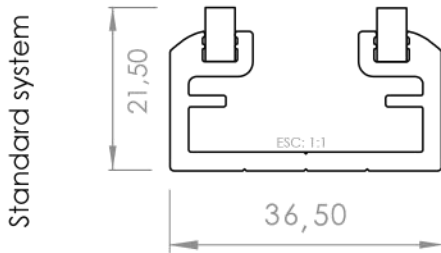

Manufacturing & installing advantages

SIMPLE MANUFACTURING

Extremely easy processes.
No need for special training.

EASY TO INSTAL

Components designed
to optimize time on site.

TIME SAVING

Manufacturing up to a
50% faster. Installation
in half of the time.

ZERO MAINTENANCE

No need for annual
maintenance.

CLAROFLEX®
Distribuidora de Sistemas de Cierre, S.L.
Nicolás Redondo, 1. P. I. El Cerro de Cártama
29570 Cártama, Málaga. SPAIN.
Tel: +34 952 427 141
e-mail: info@claroflex.com

www.claroflex.com



Like Us!

Fenestram Corporation

69A Kundiman Street, Brgy. Paltok,
San Francisco Del Monte, Quezon City
Philippines 1105
marketing@fenestramcorp.com.ph
www.fenestramcorp.com.ph

0917-182-uPVC
(8 7 8 2)